


DC-4G, 1W , 4.3-10 Female to 4.3-10 Male, 3~30dB Attenuator

Specifications :

Part No.	HTATT-4G-XX-1W-43F43M						
Electricals							
Operating Frequency	DC-4000MHZ						
Impedance (Ohm)	50						
VSWR	≤1.25@DC-4000MHz						
PIM(dBc)	≤-130dBc@2*20dBm						
Application	Indoor & Outdoor						
Degree of Protection	IP65						
Handling Power (Watt)	1W						
Interface	4.3-10 Female (input) to 4.3-10 Male (output)						
Operating Temperature (°C)	-40 ~ + 80						
Attenuation (dB)	3	5	6	10	15	20	30
Attenuation Tolerance (dB)	±0.4	±0.4	±0.5	±0.7	±0.8	±0.8	±0.8
Mechanicals							
Dimension (mm)	35 ×Φ 18 (excludes connectors) 71 .4 ×Φ 18 (includes connectors)						
Net Weight (g)	80						
Color	silver						

Outline drawing :

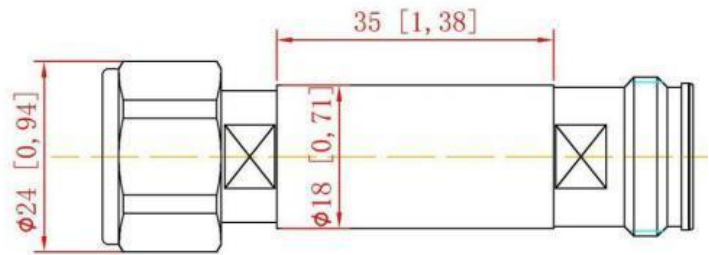

4.3-10M output

4310F input