


## 1/2" Superflex Jumper, 7/16 DIN male straight to N Female straight

**Specifications :**

Part No.	12S-DINM-NF-L
<b>Electrical Performance</b>	
Characteristic Impedance	50 ohm
Frequency Range	DC-6GHz
VSWR	$\leq 1.2$ (DC-3GHz),
PIM3	$\leq -155$ dBc
Dielectric Withstanding Voltage	$\geq 2500$ V RMS,50Hz,at sea level
Dielectric Resistance	$\geq 5000$ M $\Omega$
Contact Resistance	Center Contact $\leq 0.4$ m $\Omega$ Outer Contact $\leq 0.2$ m $\Omega$
Durability	Mating cycles $\geq 500$
<b>Material and plating</b>	
Body	Brass, Tri-Alloy plating
Insulator	PTFE, NATURAL
Contact PIN	Phosphor Bronze,Ag plating
<b>Environmental</b>	
Temperature Range	-40 $^{\circ}$ C $\sim$ +85 $^{\circ}$ C
Waterproof(1m water depth, 24hours)	IP68
RoHS	Full RoHS-Compliance

**Outline drawing :**

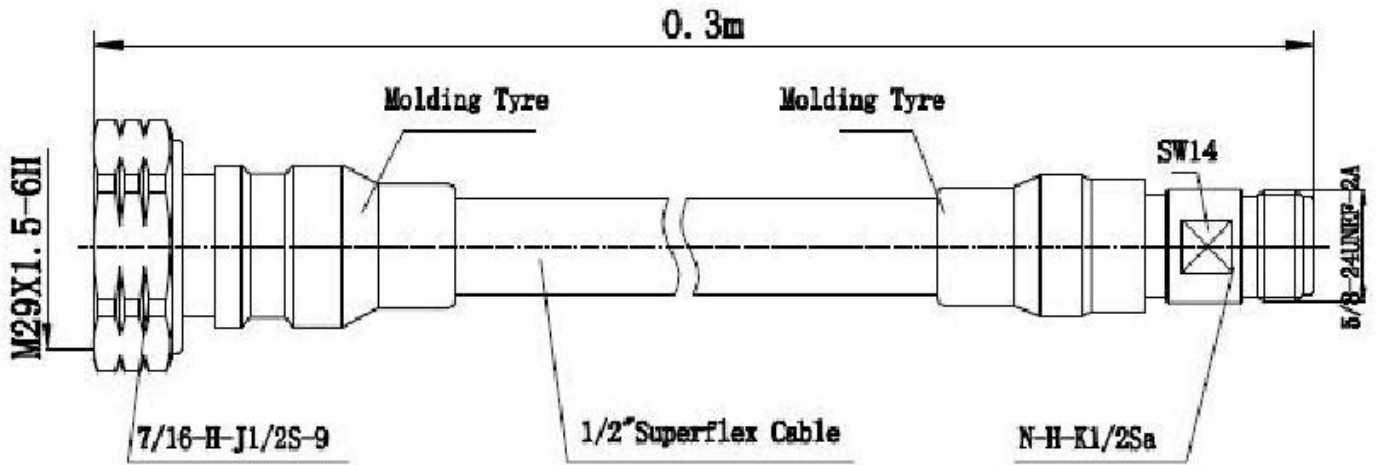

Product picture :

